

Generator (37kVA~340kVA)

RENT ALL
THAI RENT ALL CO., LTD.

Generator



DCA45




DCA60



DCA150

Dimension

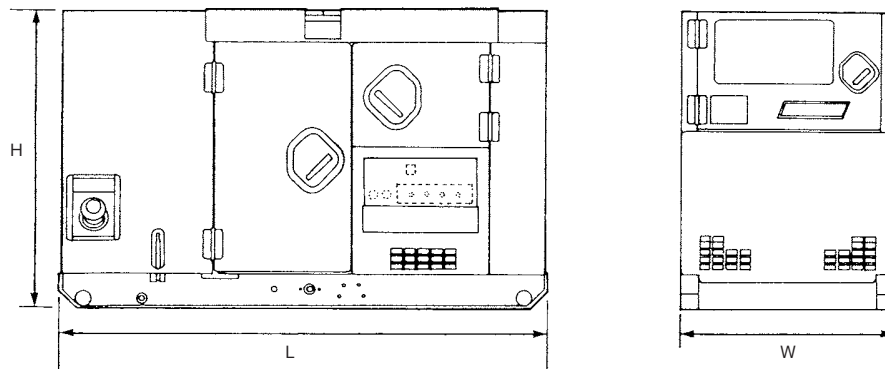

Specifications

M O D E L			DCA-45SPI	DCA-45ESI	DCA-60SPI	DCA-60ESI	DCA-90SPH
Alternator	Frequency	Hz	50				
	Output rating	kVA	37	37	50	50	75
		kw	29.6	29.6	40	40	60
	No.of phase		3-Phase, 4-Wire				
	Rated voltage	V	Single Voltage System Line 190~215(220)or 380~430(440)				
	Power factor		0.8(Lagging)				
	Voltage regulation	%	Within±1.5	Within±1.0	Within±1.5	Within±1.0	Within±1.5
Excitation		Blushless, Rotating Exciter(With A.V.R.)					
Engine	Output rating		46.5	46.5	64	66	95
			34.2	34.2	47.07	48.5	69.87
	Fuel consumption	ℓ /h	6.5	6.5	9.4	8.8	12.3
	Fuel tank capacity	ℓ	100	100	125	125	185
Unit	Dimensions (L×W×H)	mm	2,000×880×1,250	2,000×880×1,250	2,420×880×1,250	2,050×880×1,250	2,900×1,050×1,400
	Dry weight	kg	1,180	1,180	1,400	1,240	1,975

M O D E L			DCA-125SPK	DCA-125ESM	DCA-150SPK	DCA-150ESH	DCA-180SPK3	DCA-220SPK	DCA400SPM
Alternator	Frequency	Hz	50						
	Output rating	kVA	100	100	125	125	150	200	340
		kw	80	80	100	100	120	160	272
	No.of phase		3-Phase, 4-Wire						
	Rated voltage	V	DUAL Voltage System Line 190~215(220)or 380~430(440)						
	Power factor		0.8(Lagging)						
	Voltage regulation	%	Within ± 1.5	Within ± 1.0	Within ± 1.5	Within ± 1.0	Within ± 0.5	Within ± 1.5	Within ± 1.5
Excitation		Blushless, Rotating Exciter(With A.V.R.)							
Engine	Output rating	PS/rpm	133	145	153	153	185	242	400
		kW/min ⁻¹	97.8	107	113	113	136	178	294
	Fuel consumption	ℓ /h	15.5	16.5	19.5	19.3	22.4	29.4	51.4
	Fuel tank capacity	ℓ	250	250	250	250	300	380	490
Unit	Dimensions (L×W×H)	mm	3,000×1,080×1,500	3,280×1,080×1,500	3,350×1,200×1,500	3,200×1,180×1,500	3,300×1,200×1,500	3,650×1,300×1,750	4,300×1,400×2,100
	Dry weight	kg	2,120	2,290	2,740	2,360	2,900	3,670	4,700

Welding Machine Portable Generator

Thailand THAI RENT ALL CO., LTD.

Welding Machine

Engine Welding Machine




DLW300ES

Specifications

M A K E	Denyo	
M O D E L	DLW300ES	DAW500S
Current range (A)	30-280	40-500
Engine rated output (ps)	17.5	34.5
Applicable electrode (mm)	2.0-6.0	2.0-8.0
Weight (kg)	384	435
Dimensions (mm)	Length (mm)	1410
	Height (mm)	680
	Width (mm)	760
Duty cycle	200A-100%	400A-100%
	300A-40%	500A-40%
Fuel tank capacity (ℓ)	Diesel 36	Diesel 45

Arc Welding Machine

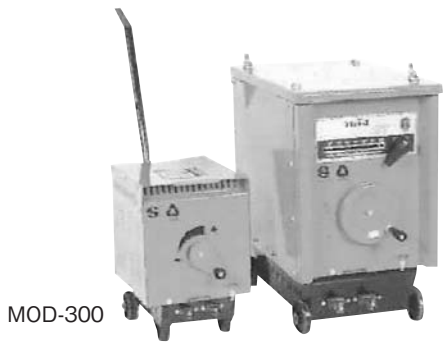

MOD-300

Specifications

M A K E	Palang	
M O D E L	MOD-300	MOD-500
Power source (V)	220	220
Input (kW/kVA)	13/24.5	23.5/44
Duty cycle (%)	40	60
Current range (A)	45-300	80-500
Dimensions [L×W×H] (cm)	41×63×74	49×72×79
Weight (kg)	120	192

Arc/Tig Welding Machine

Specifications

M O D E L	PTM-200	PTM-300
Power source (V)	380	380
Input (kW/kVA)	8.3/15.3	13/24.5
Duty cycle (%)	40	40
Current range (A)	AC	40-200
	DC	35-170
Dimensions [L×W×H] (cm)	47×73×63.5	49.5×80×73
Weight (kg)	104	137

Portable Generator



Portable Generator

Specifications

M A K E	YUH	Makita
M O D E L	SH2900DX	G-2900LX
AC Output [Cont] (KVA)	2.5	2.1
AC Output [Max] (KVA)	3	2.4
Frequency (Hz)	50	50
Voltage (V) / Phase	220 / single	220 / single
Fuel	Petrol	Petrol
Fuel Tank Capacity (ℓ)	17	16.6
Fuel Consumption (ℓ / h)	1.0	1.4
Dimensions (mm)	Length	605
	Width	422
	Height	474
Weight (kg)	42	44kg

※ AVR ALTERNATOR (G-2900LX)